



Manufactured By
Arturo Salice S.p.A.
Como, Italy

Only
Made in Italy
Since 1926

www.saliceamerica.com

General Description

Grade 2, soft close, concealed cabinet and furniture hinge.

Four pivot points with an opening angle of 105 degree.
Soft Closing, galvanized spring.

All steel construction. Nickel or Titanium plated.
Corrosion resistant.
Self-lubricating.

Fully adjustable by mechanical means.
Compatible with all Salice series 200, mounting plates.

Applications

Suitable for commercial and institutional case work, office furniture and residential cabinetry when a silent close function is desired.

Use where a 105 degree opening is desired.

Available for full overlay, partial overlay and inset applications.

Maximum door thickness: 13/16" (20mm) *
Minimum door thickness: 5/8" (16mm)
Hinge cup depth: 1/2" (12mm)

Certifications: ANSI/BHMA, ISO9001, ISO14001

ANSI/BHMA

ANSI/BHMA A156.4

A.156.9-944.2
Sections: 4.2 Hinge set test.
Sections: 4.3 Operating life cycle
Sections: 4.4 Closing and extension

www.buildershardware.com
www.ansi.org

ARCAT Specification

Section 06 41 20
Cabinet/Drawer Hardware

www.arcat.com

ISO9001

DNV-GL

MANAGEMENT SYSTEM
CERTIFICATE

ARTURO SALICE S.p.A. - Sede Legale e Operativa
Via Francesco Ferruccio, 10 - 22060 Novate (CO) - Italy

ISO 9001:2015

www.iso.org/home.html

ISO14001

DNV-GL

MANAGEMENT SYSTEM
CERTIFICATE

ARTURO SALICE S.p.A. - Sede Legale e Operativa
Via Francesco Ferruccio, 10 - 22060 Novate (CO) - Italy

ISO 14001:2015

www.iso.org/home.html

Environmental Responsibility

Arturo Salice S.p.A. continually takes steps to insure our activities result in a positive impact on the environment. All Salice products exceed all international standards for environmental responsibility in the manufacturing process. This includes full compliance with ROHS certification. www.rohsguide.com


Buy American Act

Salice America meets all requirements to be in compliance with the Buy American Act. Title 41: 41 U.S.C. §§ 8301-8305. www.fas.org/sgp/crs/misc/R43140.pdf

Consumer Product Safety Improvement Act 2008


All products manufactured by Arturo Salice S.P.A. are in compliance with consumer safety for lead content pursuant to CPSIA Title 1 Section 101. www.cpsc.gov/Regulations

Number of Hinges Specification

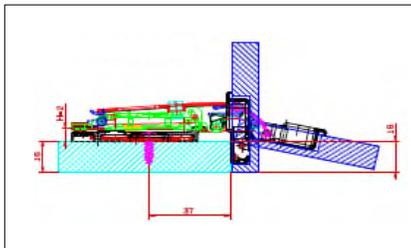

- 2 hinges:** Doors up to 36 inches high, up to 20 inches wide, 20 lbs or less.
 - 3 hinges:** Doors up to 60 inches high, up to 20 inches wide, 40 lbs or less.
 - 4 hinges:** Doors up to 84 inches high, up to 20 inches wide, 60 lbs or less.
 - 5 hinges:** Doors up to 96 inches high, up to 20 inches wide, 80 lbs or less.
- * Please contact Salice America for doors beyond these size and weight specifications.

Boring Pattern



Item Codes

C1_6AE9	105 Degree, Soft Close, Full Over, Nickel
C1_6DE9	105 Degree, Soft Close, 1/2" Over, Nickel
C1_6GE9	105 Degree, Soft Close, Half Over, Nickel
C1_6PE9	105 Degree, Soft Close, Inset, Nickel
C1_6AE6	105 Degree, Soft Close, Full Over, Titanium
C1_6DE6	105 Degree, Soft Close, 1/2" Over, Titanium
C1_6GE6	105 Degree, Soft Close, Half Over, Titanium
C1_6PE6	105 Degree, Soft Close, Inset, Titanium

"Space" _ Indicates fastening method. Fabricators choice.

Industry Affiliations

Salice America actively participates with the top industry associations to maintain the highest possible quality assurance standards for the industry. Some industry partners include:

National Kitchen & Bath Association
www.nkba.org

Kitchen Cabinet Manufacturers Association
www.kcma.org

North American Building Materials Distribution Association
www.nbmada.org/p/ca/vi/sid=28

Architectural Woodworking Institute
www.awinet.org

Woodwork Institute
www.woodworkinstitute.com

Cabinet Makers Association
www.cabinetmakers.org

* The maximum door thickness stated is based on the maximum door thickness possible while maintaining aesthetically pleasing, minimal reveals between 2 doors.