



Sales Bulletin  
June 2018



### Infinex Aluminum Extrusions

Flush Aluminum Extrusion with no end caps - meant for channels that go the entire width or height of the casework. Can be used with Flextape (see reverse) and Equiline Tape LED lighting.

- Comes with milk diffuser (unattached)
- Uses standard starter lead (LED-TPEPKT-2M)

72" (can be cut to size) x 3/4" width x 7/16" height

Route a channel in wood 7/16" x 3/4" width and pressure fit extrusion in place.



<u>Code</u>	<u>Description</u>	<u>List/ea</u>
XFL72-SC	Flush Aluminum Extrusion, 72" Satin Clear w/ Milk Diffuser	\$ 48.12




### Equiline Tape LED Lighting



The low profile and flexibility of the Equiline Tape LED makes it the perfect light for displays, signs and perimeter lighting. Sold by the roll and has adhesive backing for effortless installation. 3500K Neutral White.

May be used with new Infinex Aluminum Extrusions.



- 16.4' Rolls / Max 20' per 60W power supply
- 3 watts per foot, cuttable every 1"
- 3500K Neutral White
- 12VDC input voltage
- 25000 hour diode life

<u>Code</u>	<u>Description</u>	<u>List/rl</u>
TPELED-35HER	Equiline Tape LED, 3W/ft, 3500K Neutral White	\$ 224.52



Warm White LED FlexTape

### FLEXTAPE LED LIGHTS (from page 1014 MP Catalog)

- Avg. rated life: 50,000 hrs
- 1.5 Watts / foot
- Sold by 4' and 20' rolls (L x 3/8" W x 1/16" H)
- Cutable every 49mm (2 inches)
- Low heat
- Strong 3M adhesive backing
- Dimmer available
- Avail. in Warm & Cool White
- Linkable

This flexible LED tape's low profile allows use in many discreet locations. It has an adhesive backing for easy mounting. Sold per roll.

Applications: Cove lighting, Back lighting, Accent and Edge lighting, Toekick, Soffit

### REQUIRED PARTS



#### FLEXTAPE LED

Roll Size 20' or 4'.  
Cutable every 2".



Code	Description	List
LED-FLXTPE-WROLL	Warm White, 20'	\$ 394.29
LED-FLXTPE-4	Warm White, 4'	131.43
LED-FLXTPE-CROLL	Cool White, 20'	424.62
LED-FLXTPE-C4	Cool White, 4'	132.88

#### TRANSFORMER - 60W

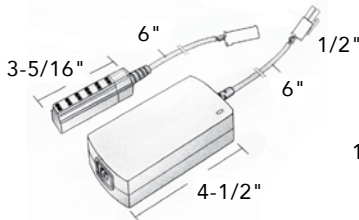

Maximum run of FlexTape from a single Transformer is 40 ft. Mounting Block and Power Cord are included with each Transformer. Black.

Code	Description	List
DC-ELT60-CON	60W 12VDC Transformer	\$ 74.55

#### STARTER CORD

Connects each FlexTape segment to mounting block of transformer. Length: 79".

Straight Feed



Code	Description	List
LED-TPEPKT-2M	Straight Feed	\$ 8.94
LED-TPEPKT-2M-TEE	Split Feed	14.16

### OPTIONAL ACCESSORIES

See Tresco Accessories pages 1020-1025 for further details.

Code	Description	List
TS2-72	Touch On/Off Switch	\$ 50.04
RDSW-2M-WH	Round Switch, White	18.91
RDSW-2M-BL	Round Switch, Black	18.91
LED-TPEPKT-2M-TEE	Split Feed Starter Cord	14.16
LED-DIMRMT-12V8A	LED Dedicated Remote Control Dimmer	82.50
LED-DIMRMT-12V8A-U	LED Universal Remote Control Dimmer	82.90
LED-DIMCON-WH	Manual Rotary Dimmer, White	51.56
LED-DIMCON-BL	Manual Rotary Dimmer, Black	51.56
MALEAMP	Amp Connector	12.03
LED-TPELNK-TEE	Tee Connector	5.83
LED-TPELNK-CON90	Right Angle Connector	5.15
LED-TPELNK-5	Jumper Cord, 2"	5.34
LED-TPELNK-15	Jumper Cord, 6"	5.83
LED-TPELNK-25	Jumper Cord, 10"	6.56
LED-TPELNK-60	Jumper Cord, 24"	7.40
LED-TPELNK-120	Jumper Cord, 48"	7.76
LED-TPELNK-180	Jumper Cord, 72"	8.40
LED-LINKD-25	Extension Cord, 10"	6.19
LED-LINKD-60	Extension Cord, 24"	7.91
LED-LINKD-120	Extension Cord, 48"	8.47
LED-LINKD-180	Extension Cord, 72"	10.31
LED-SMPADP-60	24" Rectangular Adaptor	7.29
LED-SMPADP-120	48" Rectangular Adaptor	9.31
LED-OVLTD-NI	Dimmer Control, Nickel	45.33
LED-OVLDS-NI	Door Sensor, Nickel	44.94
LED-OVLMS-NI	Motion Sensor, Nickel	49.89