



Update April 2018

Silentia Plus Hinges : New Soft Close Technology

Now Stocking Rapido and Logica



+/- Speed Switch


3 Speed Settings:  
++ , +- , --



2 Pistons per Cup

- **2 Pistons per cup** for smooth control on many sizes of doors
- **3 Speeds:** Selection Switch allows for slow, medium & fast closing
- **Shallow bore / Thin cup: 1/2" (12mm)**  
Fits doors to 5/8" thin

- Twin silicone oil dampers are in the hinge cup for a perfect soft closing action, in a wide range of uses and conditions.
- Silentia Plus has a Speed Switch to adjust closing resistance. This switch selects the best damping strength, even with special doors.
- Hinge range, geometrics and adjustments remain the same. Salice is the most comprehensive offering on the market
- Silentia Plus uses all current Salice mounting plates

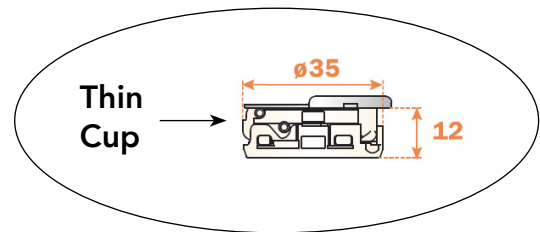


























105° Silentia+ Series 100, Pack: 300 ea.



Code	Description	List/ea
C1P6AE9	105°, Full Overlay, Screw-On	\$ 4.64
C1P6DE9	105°, 1/2" Overlay, Screw-On	4.67
C1P6GE9	105°, Half Overlay, Screw-On	4.73
C1P6PE9	105°, Inset, Screw-On	4.80
C1R6AE9	105°, Full Overlay, Dowelled	4.73
C1R6DE9	105°, 1/2" Overlay, Dowelled	4.77
C1R6GE9	105°, Half Overlay, Dowelled	4.82
C1R6PE9	105°, Inset, Dowelled	4.91

Code	Description	List/ea
C176AE9	105°, Full Overlay, Rapido	\$ 3.97
C176DE9	105°, 1/2" Overlay, Rapido	4.01
C176GE9	105°, Half Overlay, Rapido	4.06
C176PE9	105°, Inset, Rapido	4.13
C1J6AE9	105°, Full Overlay, Logica	4.44
C1J6DE9	105°, 1/2" Overlay, Logica	4.46
C1J6GE9	105°, Half Overlay, Logica	4.50
C1J6PE9	105°, Inset, Logica	4.58



Description		Fixing			
		Screw-on	Rapido	Dowelled	Logica
	Series 100. Hinges for doors of small weight and reduced thickness. 12 mm cup depth.				
	Series 200, for thicker doors. Hinges for min. 18 mm thick doors. 15.5 mm cup depth.				
	Series 700. Hinges for min. 16 mm thick doors. 13.5 mm cup depth.				
	Series 200, 155°, 0 protrusion.				
	Series 300. Hinges for display cases and cabinets with wooden or metal pilasters.				

### Ever Optimal Soft Close Action

Silentia+ is also equipped with the innovative switch to delay the decelerating action. The activation of this switch allows the ideal decelerating strength, even with special doors.

