www.macpac1.com
MACMURRAY PACIFIC

**Phone**
(415) 552-5500

**Email**
orders@macmurraypacific.com


Date _____

# SALICE

## Exedra Gravity Order Form

### HOW TO ORDER

1. Complete all the measurements in the section below.
2. Select the TYPE and DIRECTION of OPENING
3. Select HInge Kits and Optional accessories kits (next page)

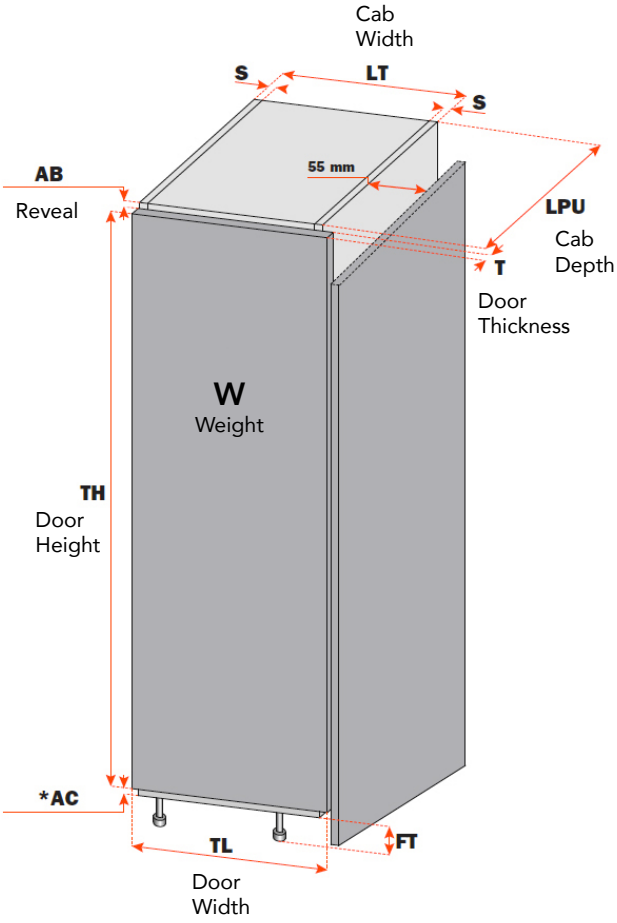



mm OR inches


| | | |
|---|---|---|
| **TH** | Door height - min 43-5/16" / max 118-1/8" | |
| **AB** | Upper reveal | |
| **AC** | Lower reveal* | |
| **TL** | Door width - min 11-13/16" / max 35-7/16" | |
| **T** | Door thickness - min 9/16" / max 1-3/16" | |
| **LPU** | Cab depth - min 11-13/16" / max 35-7/16" | |
| **LT** | Cab width | |
| **FT** | Height of the base | |
| **W** | Weight of the door - max 88 lbs** | |
| **Door Type** | Wood | |
| | Alum / 5 piece wood | |
| **S** | Thickness of cabinet sides | |

* AC minimum 3 mm with FT=0
** With TL< 29-1/2" and at least 5 hinges otherwise max 66 lbs.

### Type and direction of opening IN = Soft Close, OUT = Push-To-Open (Required)

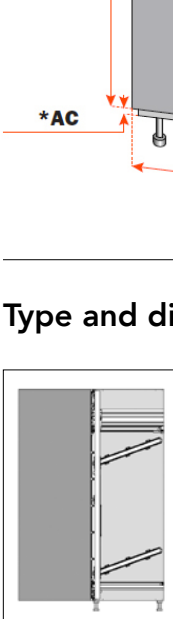

**OUT / Right**
Quantity



**OUT / Left**
Quantity



**IN / Right**
Quantity



**IN / Left**
Quantity


| |
|---|
| Contact Name: |
| |
| Company: |
| |
| Project: |
| |
| Notes: |
| |
| |
| |

(See next page)

www.macpac1.com
MACMURRAY PACIFIC
**Phone**
(415) 552-5500
**Email**
orders@macmurraypacific.com

## Choose Soft Close or Push to Open / Finish for the doors (Required)


Soft Close kit for door

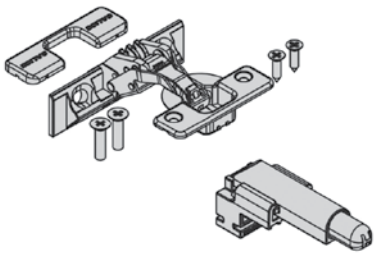

Titanium

Nickel

Push to Open kit for door

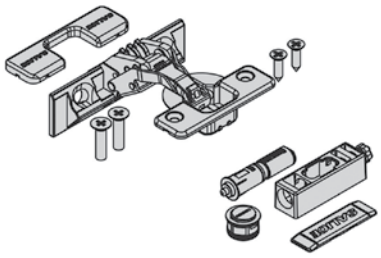

Titanium

Nickel


## Accessory Kits (Optional)

**Space required for the panel connector kit:**

**A & C:** minimum 6mm above and below the cabinet
**B:** minimum 16mm above and below the cabinet


**55mm (2-3/16") Connection**
Door thickness =
12 - 26mm (1/2" - 1")

A





**55mm (2-3/16") Connection**
Door thickness =
27 - 30mm (1-1/16" - 1-3/16")

B





**110mm (4-5/16") Connection**
Door thickness =
12 - 30mm (1" - 1-3/16")

C




Supplementary roller guide for aluminum-framed glass doors and framed wood doors

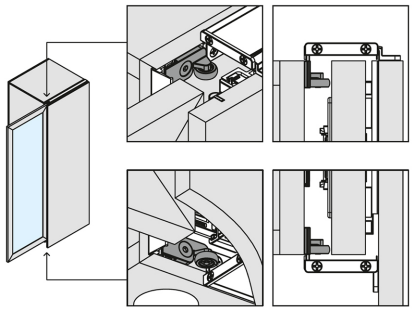

**Mechanism Features : Exedra Gravity**

- Mounting with clips to facilitate extraction of the mechanism in case of maintenance
- Quick coupling hinges

**Door Features : Exedra Gravity**

- Max weight for each door: 88 lbs (40 Kg) with 5/6 of hinges allowed
- Thickness: - min. 9/16" (14mm) - max. 1-3/16" (30mm)
- Width: - min. 11-13/16" (300mm) - max. 35-7/16" (900mm)
- Height: - min. 43-5/16" (1100mm) - max. 118-7/64" (3000mm)
- Door vertical adjustment: +4/-1 mm
- Door horizontal adjustment: ±2 mm
- Door front adjustment: ±4 mm
- Recommended space below door 1/8" (3mm)
- Material a) wood or derivatives; b) metal and glass frame