
PRIDE INDUSTRIAL LLC
DECORATIVE, FUNCTIONAL HARDWARE & MORE

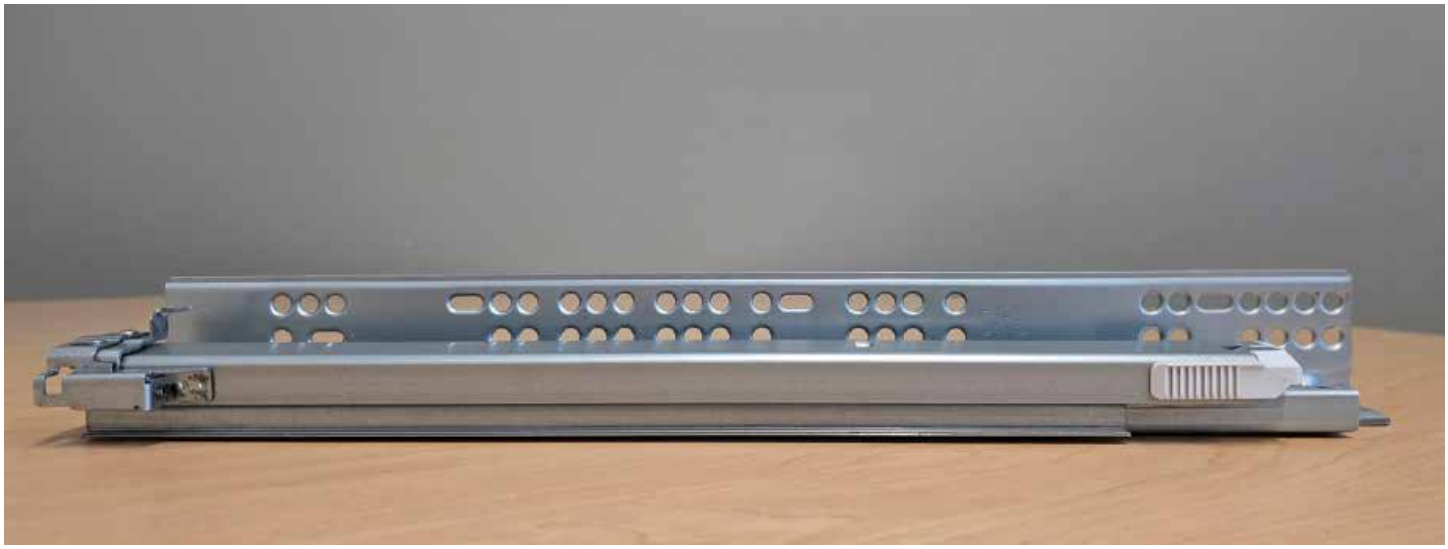

SYNCPRO UNDERMOUNT

A PRIDE PRODUCT BY
“PRIDE INDUSTRIAL”

The Sync Pro is a synchronized undermount, with true synchronization, boasting a Dynamic Load Capacity of **120 lbs** / **150 lbs** Static Load against 50,000 cycle tests, surpassing the standard 25,000 cycles required for the KCMA / ANSI Certification.

CERTIFIED CABINET
COMPLIES WITH
KCMA
ANSI
A161.1

10/2/26

It's a 3D 6-Way Adjustable Undermount with very high and accurate synchronization, enhancing the quality of your cabinet's overall performance.

The purpose of the synchronization feature is to avoid tilting, as well as providing a smoother and quieter soft-closing function than that of any standard undermount.

The Sync Pro does not require any synchronization rod or accessories **up to 40" wide drawer** avoiding additional costs.




The Sync Pro is an upgraded Full Extension undermount equipped with an integrated Soft Close mechanism completely concealed with PVC material to prevent dust and particles for longer durability and higher protection.



<u>Upper Image</u>:
Sync Pro


<u>Lower Image</u>:
Standard Undermount

The rear adjustable spring-loaded hook located at the back of the undermount provides an additional 1/8” (3mm) of depth / inset adjustment, compensating for wood intolerance or slight drawer material variations, especially when used for inset applications.

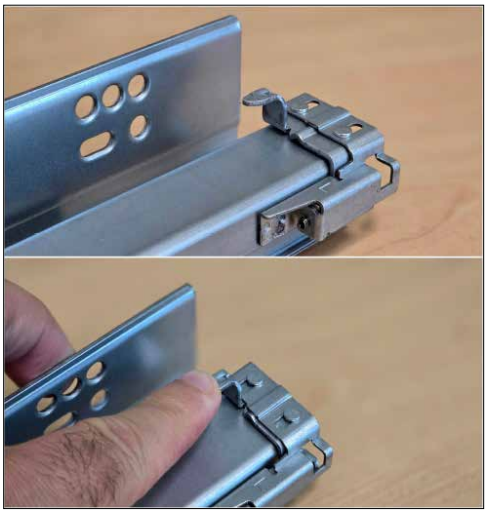


The Locking Device itself offers a depth adjustment of up to 3mm. This results in a total of 6mm combined with the spring-loaded hook on the Undermount.

This is ideal for most cabinet manufacturers using inset applications, ensuring greater accuracy, added adjustability, and excellent drawer performance.

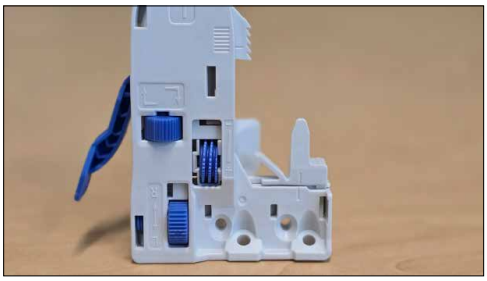


The Locking Device’s flat side has been carefully designed with a structured lip to prevent the clip from lifting when screws are mounted to the drawer.

This feature can be seen when the Locking Device is in standing position, providing a more secure locking grip between the Locking Device and the Undermount.

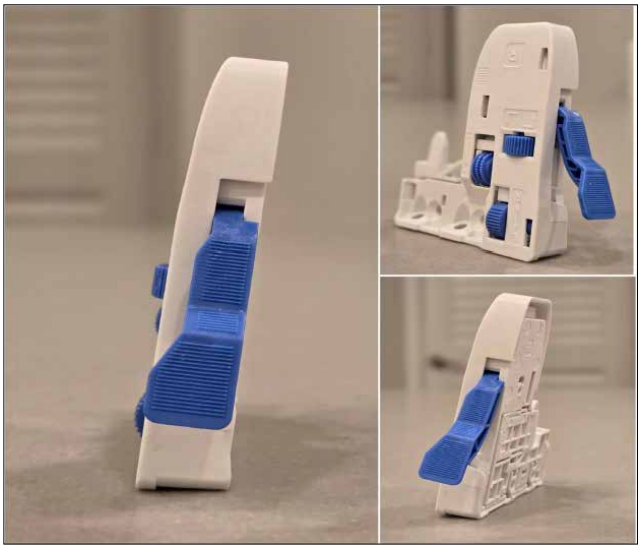


The front of the undermount features a ragged plastic piece holding multiple cleats allowing stronger engagement together with the teeth on the Locking Device, making the clipping much stronger and durable.

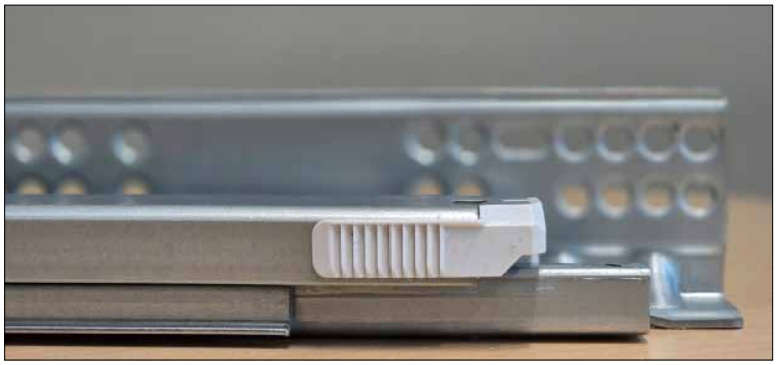

The Sync Pro Undermount has been specifically designed to be used for Trash Pull Outs or Tall Pantries utilizing the 6 pre-drilled bottom holes featured on the bottom of the slide. (3 front holes / 3 back holes).




This undermount has been also modified to easily replace any existing undermount, due to the multiple hole patterns running along its sides for ensuring a more secure and flexible fit.

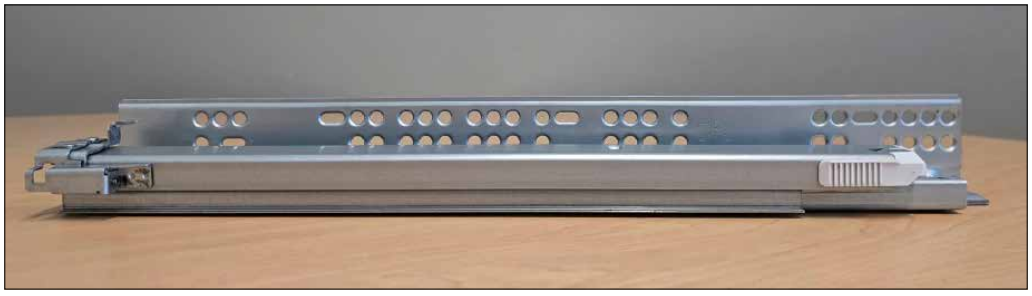

3D 6-Way Locking Device Adjustment

> Side-to-Side: +/- 1.5mm
> Up and Down: 0 to 3mm
> In and Out: 0 to 3mm, and up to 6mm utilizing the rear spring-loaded hook on the undermount.

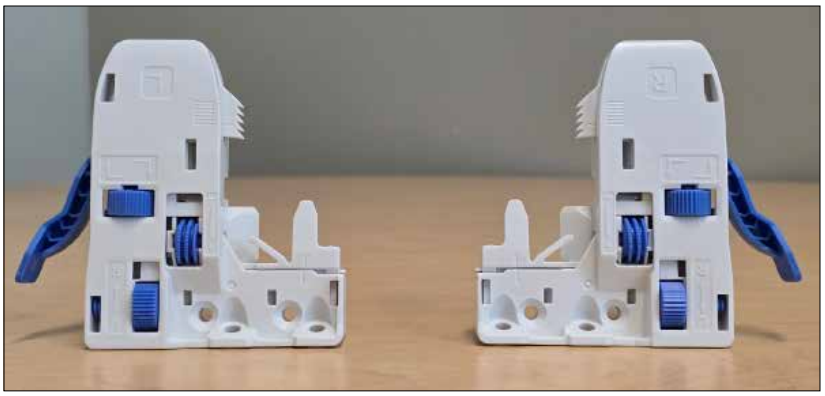

The Sync Pro Undermount is available for 1/2” – 5/8” and for 3/4” – 7/8” drawer material thickness.

1/2” – 5/8” Material:
24” Undermount (61SF-24)
21” Undermount (61SF-21)
18” Undermount (61SF-18)
15” Undermount (61SF-15)
12” Undermount (61SF-12)

3/4” – 7/8” Material:
21” Undermount (61SF34-21)
18” Undermount (61SF34-18)
15” Undermount (61SF34-15)
12” Undermount (61SF34-12)



Precision engineering meets effortless performance with enhanced stability and smoother drawer operation built to handle 120 lbs with unmatched durability.

